



## ■ VIS SANS TÊTE A SIX PANS CREUX A BOUT CONIQUE


ISO 4027 DIN 914

ACIER CLASSE 45H ZN

Modèle  
**23501**

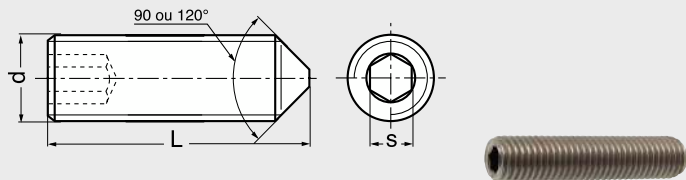

 **RÉFÉRENCES MEMENTO TECHNIQUE**  
7.4 Fragilisation par l'hydrogène  
4.5 Les vis de pression

 HEXAGON SOCKET SET SCREW CONE  
POINT 45H CLASS ZINC PLATED  
ESPARRAGO ROSCADO CON HEXAGONAL  
INTERIOR Y EXTREMO CONICO ACERO  
CALIDAD 45H EN BRUTO  
VITE SENZA TESTA CON CAVA ESAGONALE  
ESTREMITA CONICA CLASSE 45H ZINCATO  
BIANCO DEIDROGENATA



d nominal s (mm)	M4 2	M5 2,5	M6 3	M8 4	M10 5
---------------------	---------	-----------	---------	---------	----------

$\varnothing 2 \text{ à } 6 : \alpha = 120^\circ$  pour  $1d < L \leq 1,2 L$  -  $\varnothing > 6 : \alpha = 90^\circ$  pour  $L > 1d$

Référence	d x L (mm)
235014X6	4x6
235014X8	4x8
235014X10	4x10
235014X20	4x20

Référence	d x L (mm)
235015X8	5x8
235015X10	5x10
235015X12	5x12
235016X8	6x8

Référence	d x L (mm)
235016X10	6x10
235016X12	6x12
235016X16	6x16
235016X20	6x20

Référence	d x L (mm)
235016X30	6x30
235018X10	8x10
235018X12	8x12
235018X16	8x16

Référence	d x L (mm)
235018X20	8x20
2350110X16	10x16
2350110X20	10x20