


# VIS A METAUX TETE FRAISEE BOMBEE FENDUE

DIN 964

INOX A4

Modèle  
**64209**

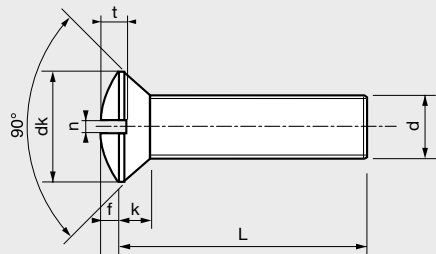

## RÉFÉRENCES MEMENTO TECHNIQUE

11.29 Classification des aciers inoxydables couramment utilisés en boulonnerie-visserie



SLOTTED RAISED COUNTERSUNK HEAD MACHINE SCREW STAINLESS STEEL A4

TORNILLO DE SEGURIDAD CABEZA AVALLENADA ABOMBADA RANURADA INOX A4

VITE A TESTA SVASATA BOMBATA CON INTAGLIO ACCIAIO INOSSIDABILE A4



ECROU HEXAGONAL DIN 934 - INOX A4  
Modèle 64601  
Page I 69



RONDELLE PLATE MOYENNE TYPE 4M - NFE 25513  
Modèle 64501  
Page I 108



EMBOUIT PLAT - ACIER  
Modèle 36066  
Page O 11

d nominal	M3	M4	M5	M6	M8	M10
dk (mm)	5,6	7,5	9,2	11	14,5	18
k (mm)	1,65	2,2	2,5	3	4	5
f (mm)	0,75	1	1,25	1,5	2	2,5
n (mm)	0,8	1	1,2	1,6	2	2,5
t (mm)	1,2	1,6	2	2,4	3,2	4

Référence	d x L (mm)
642093X6	3X6
642093X8	3X8
642093X10	3X10
642093X12	3X12
642093X16	3X16
642093X20	3X20
642093X25	3X25
642093X30	3X30
642093X35	3X35
642093X40	3X40
642094X6	4X6
642094X8	4X8
642094X10	4X10
642094X12	4X12
642094X16	4X16
642094X20	4X20

Référence	d x L (mm)
642094X25	4X25
642094X30	4X30
642094X35	4X35
642094X40	4X40
642094X50	4X50
642094X60	4X60
642095X8	5X8
642095X10	5X10
642095X12	5X12
642095X16	5X16
642095X20	5X20
642095X25	5X25
642095X30	5X30
642095X35	5X35
642095X40	5X40
642095X45	5X45

Référence	d x L (mm)
642095X50	5X50
642095X60	5X60
642095X70	5X70
642095X80	5X80
642095X90	5X90
642096X10	6X10
642096X12	6X12
642096X16	6X16
642096X20	6X20
642096X25	6X25
642096X30	6X30
642096X35	6X35
642096X40	6X40
642096X45	6X45
642096X50	6X50
642096X60	6X60

Référence	d x L (mm)
642096X70	6X70
642096X80	6X80
642096X90	6X90
642096X100	6X100
642098X16	8X16
642098X20	8X20
642098X25	8X25
642098X30	8X30
642098X35	8X35
642098X40	8X40
642098X45	8X45
642098X50	8X50
642098X60	8X60
642098X70	8X70
642098X80	8X80
642098X90	8X90

Référence	d x L (mm)
642098X100	8X100
6420910X30	10X30
6420910X35	10X35
6420910X40	10X40
6420910X45	10X45
6420910X50	10X50
6420910X60	10X60
6420910X65	10X65
6420910X70	10X70
6420910X80	10X80
6420910X90	10X90
6420910X100	10X100