


VIS A METAUX TETE CYLINDRIQUE POZIDRIVE BOMBEE LARGE CRUCIFORME

DIN 7985
INOX A4

Modèle
64216

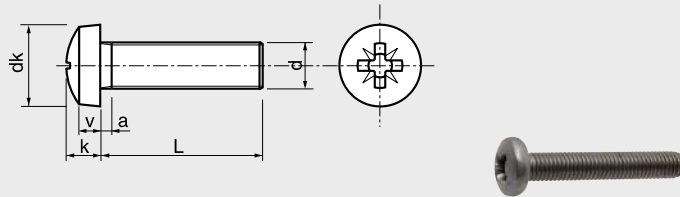

d nominal	M2	M2,5	M3	M4	M5	M6
a (mm)	0,8	0,9	1	1,4	1,6	2
v (mm)	1,1	1,3	1,6	2	2,5	3
k (mm)	1,6	2	2,4	3,1	3,8	4,6
dk (mm)	4	5	6	8	10	12
Empreinte Z N°	1	1	1	2	2	3

Référence	d x L (mm)
642162X4	2X4
642162X5	2X5
642162X6	2X6
642162X8	2X8
642162X10	2X10
642162X12	2X12
642162X16	2X16
642162X20	2X20
642162,5X4	2,5X4
642162,5X5	2,5X5
642162,5X6	2,5X6
642162,5X8	2,5X8
642162,5X10	2,5X10
642162,5X12	2,5X12

Référence	d x L (mm)
642162,5X16	2,5X16
642162,5X20	2,5X20
642163X4	3X4
642163X5	3X5
642163X6	3X6
642163X8	3X8
642163X10	3X10
642163X12	3X12
642163X16	3X16
642163X20	3X20
642163X25	3X25
642163X30	3X30
642163X35	3X35
642163X40	3X40

Référence	d x L (mm)
642163X50	3X50
642164X6	4X6
642164X8	4X8
642164X10	4X10
642164X12	4X12
642164X16	4X16
642164X20	4X20
642164X25	4X25
642164X30	4X30
642164X35	4X35
642164X40	4X40
642164X50	4X50
642164X60	4X60
642165X8	5X8

Référence	d x L (mm)
642165X10	5X10
642165X12	5X12
642165X16	5X16
642165X20	5X20
642165X25	5X25
642165X30	5X30
642165X35	5X35
642165X40	5X40
642165X50	5X50
642165X60	5X60
642166X10	6X10
642166X12	6X12
642166X16	6X16
642166X20	6X20

Référence	d x L (mm)
642166X25	6X25
642166X30	6X30
642166X35	6X35
642166X40	6X40
642166X50	6X50
642166X60	6X60
642166X70	6X70



RÉFÉRENCES MEMENTO TECHNIQUE

- 11.29 Classification des aciers inoxydables couramment utilisés en boulonnerie-visserie
- 11.23 Tableau de choix des numéros d'embouts et clés
- 11.22 Performance des modes d'entraînement des vis : formes et empreinte NFE 25-031



ECROU
HEXAGONAL
DIN 934 -
INOX A4
Modèle 64601
Page I 69



PAN HEAD MACHINE SCREW CROSS
RECESS POZIDRIVE STAINLESS STEEL A4



RONDELLE
PLATE
MOYENNE
TYPE «M»
NFE 25513
Modèle 64501
Page I 108

TORNILLO DE SEGURIDAD CABEZA
CILINDRICA POZIDRIVE ABOMBADA ANCHA
CRUCIFORME INOX A4



EMBOUIT
POZIDRIVE -
ACIER
Modèle 36050
Page O 10

VITE A TESTA CILINDRICA BOMBATA LARGA
IMPRONTA CROCE POZIDRIV ACCIAIO
INOSSIDABILE A4